

Klaxon Mobility

the art of moving





Model	Klick Electric
Material	Aluminium
Motor	36V x 370W Brushless
Wheel	14" smooth tyre tread
Display	Multifunction LCD, 5 speed settings
Battery	Lithium 36V x 5.8 Ah (weight 1.3 kg)
Handlebar	Aluminium, adjustable in height, depth and angle
Brakes	Double Brake system 160 mm
Size	W 50 cm x H 84 cm x D 40 cm
Connection	Klick Linking System Klaxon® (worldwide patented)
Weight	7.9 kg (battery excl.)
Range	About 25 km (speed setting 1, level ground)
Included accessories	Battery 5.8 Ah with battery charger, reverse gear, LCD display, bell, kickstand, splashguard, complete linking system

KLICK Electric



LIGHT

and easy to handle

QUICK

and easy to attach



ADAPTABLE

kickstand for easy handling




MASTER

and overcome everyday obstacles

COMPACT

and suitable for travel

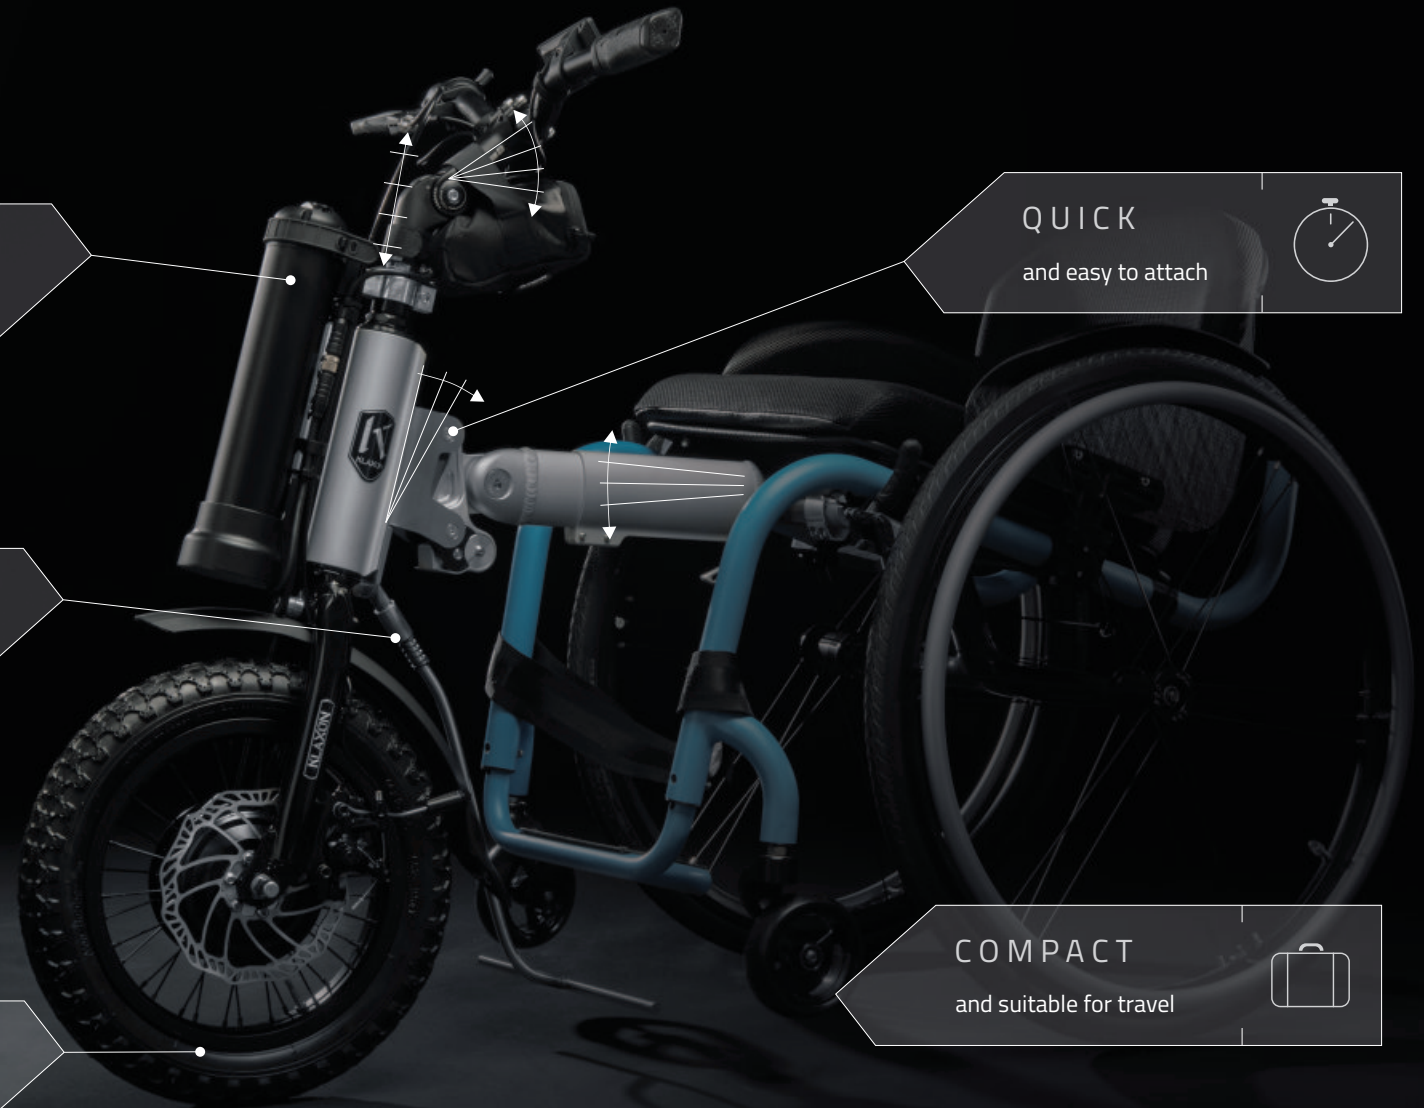



Model	Klick Electric Power
Material	Aluminium
Motor	36V x 370W Brushless
Wheel	14" smooth tyre tread
Display	Multifunction LCD, 5 speed settings
Battery	Lithium 36V x 11 Ah (weight 3.3 kg)
Handlebar	Aluminium, adjustable in height, depth and angle
Brakes	Double Brake system 160 mm
Size	W 50 cm x H 84 cm x D 40 cm
Connection	Klick Linking System Klaxon® (worldwide patented)
Weight	7.9 kg (battery excl.)
Range	About 50 km (speed setting 1, ground level)
Included accessories	Battery 11 Ah with battery charger, reverse gear, LCD display, bell, kickstand, splashguard, complete linking system



KLICK Electric

POWER



LONG RANGE

suitable for long distance driving



ADAPTABLE

kickstand for easy handling



CLIMB

steep roads and hills

QUICK

and easy to attach



COMPACT

and suitable for travel





Model	Klick Electric Tetra
Material	Aluminium
Motor	36V x 370W Brushless
Wheel	14" smooth tyre tread
Display	Multifunction LCD, 5 speed settings
Battery	Lithium 36V x 5.8 Ah (weight 1.3 kg)
Handlebar	Aluminium, adjustable in height, depth and angle, Comfort Drive System (accelerator and brake activated through push and pull movement)
Brakes	Double Brake system 160 mm
Size	W 50 cm x H 95 cm x D 40 cm
Connection	Klick Linking System Klaxon® (worldwide patented)
Weight	8.9 kg (battery excl.)
Range	About 25 km (speed setting 1, ground level)
Included accessories	Comfort Drive System, Battery 5.8 Ah with battery charger, reverse gear, LCD display, bell, kickstand, splashguard, complete linking system

KLICK Electric Tetra



LIGHT

and easy to handle



ADAPTABLE

kickstand for easy handling



MASTER

and overcome everyday obstacles

QUICK

and easy to attach



COMPACT

and suitable for travel





Model	Klick Electric Tetra Power
Material	Aluminium
Motor	36V x 370W Brushless
Wheel	14" smooth tyre tread
Display	Multifunction LCD, 5 speed settings
Battery	Lithium 36V x 11 Ah (weight 3.3 kg)
Handlebar	Aluminium, adjustable in height, depth and angle, Comfort Drive System (accelerator and brake activated through push and pull movement)
Brakes	Double Brake system 160 mm
Size	W 50 cm x H 95 cm x D 40 cm
Connection	Klick Linking System Klaxon® (worldwide patented)
Weight	8.9 kg (battery excl.)
Range	About 50 km (speed setting 1, level ground)
Included accessories	Comfort Drive System, Battery 11 Ah with battery charger, reverse gear, LCD display, bell, kickstand, splashguard, complete linking system



KLICK Electric Tetra

POWER



CLIMB

steep roads and hills



LONG RANGE

suitable for long distance driving



MASTER

and overcome everyday obstacles

QUICK

and easy to attach



ADAPTABLE

kickstand for easy handling



COMPACT

and suitable for travel



ACCESSORIES



1



2



3



4



5



8

6



7



- 1 Battery 11 Ah with battery charger
Available fly-version 2.5 Ah with battery charger
- 4 X-large wheelset for off-riding

- 2 Battery 5.8 Ah with battery charger
Available fly-version 2.5 Ah with battery charger
- 5 14" Tyres, tyre tread or smooth tread tyre

- 3 Rear-view mirror, bell and front LED light

- 6 Click Flybag

- 8 Additional weights

TECHNICAL SPECIFICATIONS

	KLICK ELECTRIC	KLICK ELECTRIC POWER	KLICK ELECTRIC TETRA	KLICK ELECTRIC TETRA POWER	NOTE
GENERAL DATA					
Material	Aluminium	Aluminium	Aluminium	Aluminium	
Motor (Brushless) with reverse gear	250W	250W	250W	250W	
Drive system	Electric propulsion	Electric propulsion	Electric propulsion	Electric propulsion	
Display	Multifunction LCD	Multifunction LCD	Multifunction LCD	Multifunction LCD	
Brakes (Mechanical brakes)	Disk brakes 160 mm	Disk brakes 160 mm	Disk brakes 160 mm	Disk brakes 160 mm	
Field of use	Outdoor and indoor	Outdoor and indoor	Outdoor and indoor	Outdoor and indoor	
PERFORMANCE					
Maximum speed setting	3; 6; 10; 13; 16 km/h	3; 6; 10; 13; 16 km/h	3; 6; 10; 13; 16 km/h	3; 6; 10; 13; 16 km/h	
Range (Battery 11 Ah)	-	50 km	-	50 km	At moderate speed, level ground, weight load 75kg
Range (Battery 5,8 Ah)	25 km	-	25 km	-	At moderate speed, level ground, weight load 75kg
Maximum incline capability	10%	10%	10%	10%	Fully charged battery, weight load 75kg
Maximum obstacle climbing height	50 mm	50 mm	50 mm	50 mm	
Engine power	370 W	370 W	370 W	370 W	
Motor voltage	36 V	36 V	36 V	36 V	
Maximum weight capacity	120 Kg	120 Kg	120 Kg	120 Kg	Subject to limitation of wheelchair
DIMENSIONS					
Depth	56 cm	56 cm	56 cm	56 cm	
Width	63cm	63cm	63cm	63cm	
Height	72 cm	72 cm	72 cm	72 cm	
Weight	7,9 kg	7,9 kg	8,9 kg	8,9 kg	Excluding battery and linking system
Battery 11 Ah	-	3,3 kg	-	3,3 kg	
Battery 5,8 Ah	1,3 kg	-	1,3 kg	-	
Fly Battery 2,5 Ah	0,7 kg	0,7 kg	0,7 kg	0,7 kg	
OPERATING CONDITIONS					
Maximum operating altitude	2000 m	2000 m	2000 m	2000 m	
Air pressure	700 ÷ 1060 hPa	700 ÷ 1060 hPa	700 ÷ 1060 hPa	700 ÷ 1060 hPa	
Temperature	0 ÷ 40°C	0 ÷ 40°C	0 ÷ 40°C	0 ÷ 40°C	
Relative humidity	30 ÷ 90 %	30 ÷ 90 %	30 ÷ 90 %	30 ÷ 90 %	
TRANSPORT/STORAGE CONDITIONS					
Temperature	10 ÷ 50°C	10 ÷ 50°C	10 ÷ 50°C	10 ÷ 50°C	
Relative humidity	30 ÷ 90 %	30 ÷ 90 %	30 ÷ 90 %	30 ÷ 90 %	
BATTERY CHARGER					
Operating voltage	220 V	220 V	220 V	220 V	
Frequency	50 Hz	50 Hz	50 Hz	50 Hz	
Output voltage	32 V	32 V	32 V	32 V	
BATTERY DATA					
BATTERY 5,8 Ah	BATTERY 5,8 Ah	BATTERY 11 Ah	BATTERY 5,8 Ah	BATTERY 11 Ah	Note: Fly Battery 2,5 Ah; time to recharge 2 h
Battery voltage	36 V	36 V	36 V	36 V	
Capacity	5,8 Ah	11 Ah	5,8 Ah	11 Ah	Depending on battery status
Charging time	2,5 h	4h	2,5 h	4h	
SUITABILITY CRITERIA FOR WHEELCHAIRS					
Minimum front frame width (Inside tubes)	230 mm	230 mm	230 mm	230 mm	Measured from inside front frame tube to inside front frame tube
Maximum front frame width (Inside tubes)	530 mm	530 mm	530 mm	530 mm	Measured from inside front frame tube to inside front frame tube
Wheelchair tubing styles	Round-shaped or oval-shaped	Round-shaped or oval-shaped	Round-shaped or oval-shaped	Round-shaped or oval-shaped	
Wheelchair types	Rigid frame or folding frame	Rigid frame or folding frame	Rigid frame or folding frame	Rigid frame or folding frame	
PRODUCT CLASSIFICATION					
According to the EU Medical Device Directive	Classification of risk Class I	Classification of risk Class I	Classification of risk Class I	Classification of risk Class I	
Adequate protection against electric shock	Class II	Class II	Class II	Class II	
Classification of safety	Type B	Type B	Type B	Type B	



LINKING SYSTEM KLAXON®

The innovative linking system connects to any hand bike of the KCLICK product range in seconds, allowing you to switch between your favourite KCLICK hand bikes with ease. The universal connection hub adapts to all manual wheelchair types, including foldable wheelchairs.

Experience a new level of freedom without compromising the manoeuvrability and comfort of your manual wheelchair. LINE-UP. ENGAGE. KCLICK.

QUICK
and easy to attach



LINKS
in seconds



UNIVERSAL
connection hub



Find more Infos
on our website:



Contact

KLAXON MOBILITY GmbH
High Tech Campus Villach
Europastrasse 12, 9524 Villach, Austria
+43 664 4681294
info@klaxon-klick.com
www.klaxon-klick.com